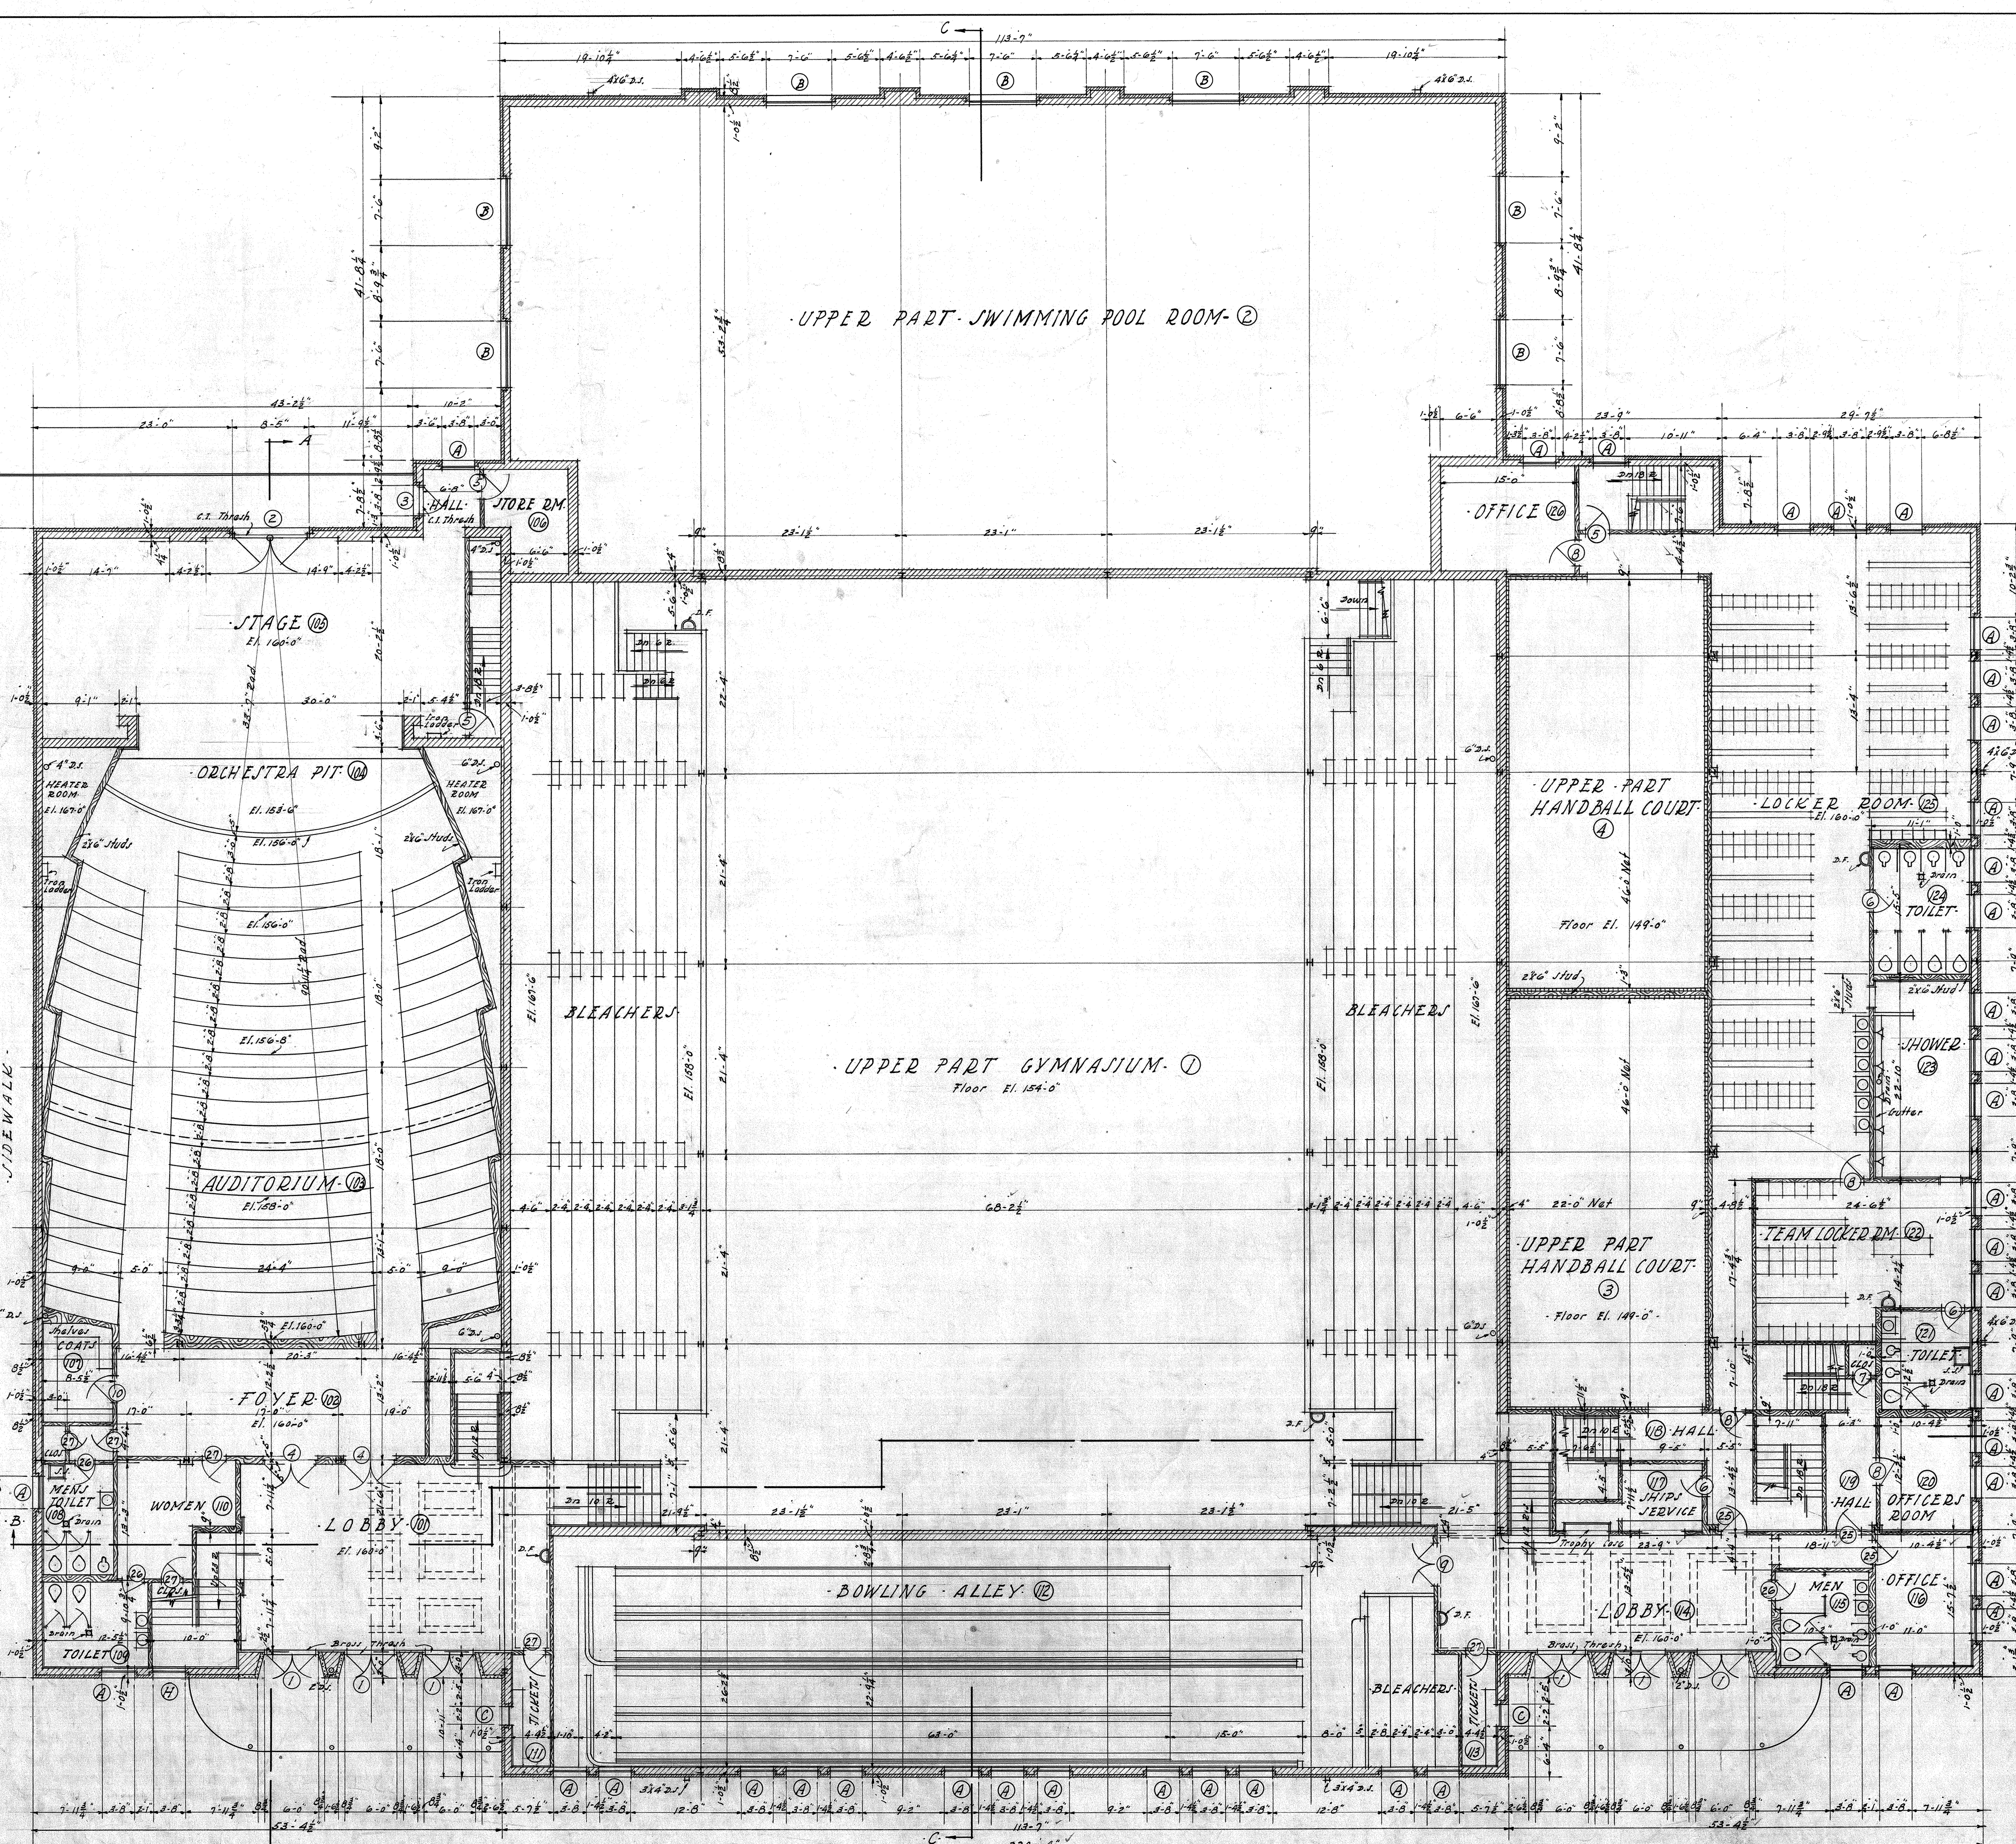

-FIRST · FLOOR · PLAN-
·Scale 1/8" = 1'-0"
·All Studs 2"x4" Except As Noted·

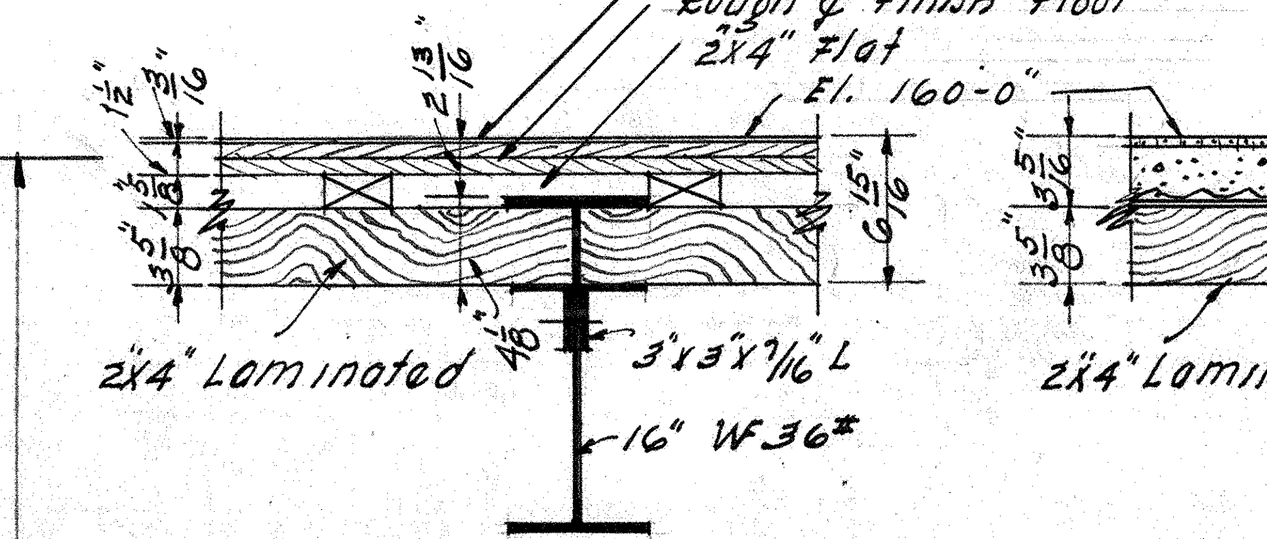

-SECTION · THRU · TYPICAL
·WOOD · FLOOR-
·Scale 1" = 1'-0"

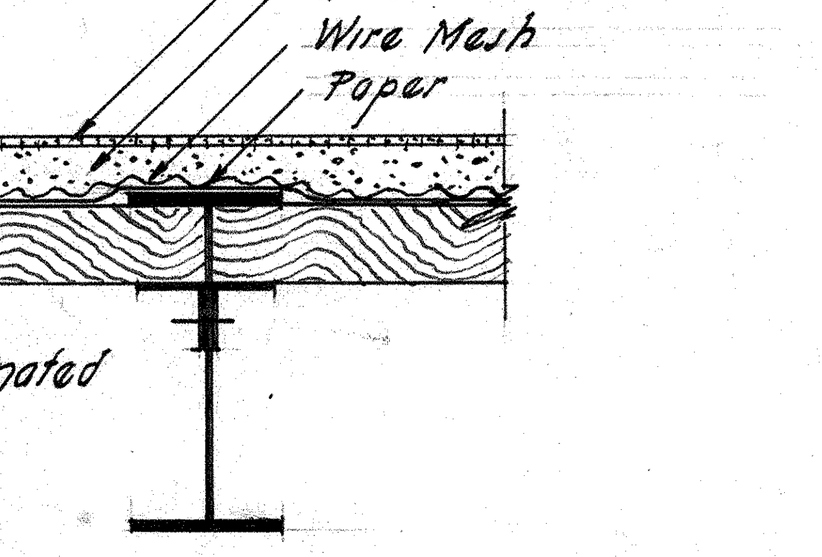

-SECTION · THRU · FLOOR · IN · TOILET
·ROOMS · 121 · 124 ·
·See Drwg # 17139 For Floor Det. In Shower #123·
Scale 1" = 1'-0"·

·FINISH · SCHEDULE·

ROOM	WALLS	CEILING	FLOOR	BASE	WNSCT	P. MOULD	TRIM	PLINTH	PAINTING	REMARKS
101	Plaster	Suspended Plaster	Composition Tile	Fir	None	None	Fir	Fir	Walls & Ceiling	See Det.
102	Plaster	Suspended Plaster	Fir	Fir	None	None	Fir	Fir	Walls & Ceiling	See Det.
103	Accoustical Plaster	Suspended Plaster	Fir	Fir	Plaster	None	Fir	Fir	Walls & Ceiling	See Det.
104	Plaster	None	Fir	Fir	None	None	Fir	Fir	Walls	Metal Rail
105	None	None	2"x4" T&G Fir	Fir	None	None	Fir	Fir	None	
106	None	None	Fir	Fir	None	None	Fir	None	None	
107	Plaster	Suspended Plaster	Composition Tile	Fir	None	None	Fir	Fir	Walls & Ceiling	Plaster Ceiling Furred To 11'-0"
108	Plaster	Suspended Plaster	Tile	Tile	None	None	Metal	None	Walls & Ceiling	
109	Plaster	Suspended Plaster	Tile	Tile	None	None	Metal	None	Walls & Ceiling	
110	Plaster	Suspended Plaster	Fir	Fir	None	None	Fir	Fir	Walls & Ceiling	
111	Plaster	Suspended Plaster	Composition Tile	Fir	None	None	Fir	Fir	Walls & Ceiling	Furred To 11'-0"
112	Pl. On Stud Only	None	Fir Around Bowling Alley	Fir	None	None	Fir	Fir	Walls & Ceiling	
113	Plaster	Suspended Plaster	Composition Tile	Fir	None	None	Fir	Fir	Walls & Ceiling	Furred To 11'-0"
114	Plaster	Suspended Plaster	Composition Tile	Fir	None	None	Fir	Fir	Walls & Ceiling	See Det.
115	Plaster	None	Tile	Tile	None	None	Metal	None	Walls & Ceiling	
116	Plaster	None	Composition Tile	Metal	None	None	Metal	None	Walls & Ceiling	
117	Plaster	None	Linoleum	Metal	None	None	Metal	None	Walls & Ceiling	
118	Plaster	None	Linoleum	Metal	None	None	Metal	None	Walls & Ceiling	
119	Plaster	None	Composition Tile	Metal	None	None	Metal	None	Walls & Ceiling	
120	Plaster	None	Composition Tile	Metal	None	None	Metal	None	Walls & Ceiling	
121	Plaster	None	Tile	Tile	None	None	Metal	None	Walls & Ceiling	
122	Pl. On Stud Only	None	Linoleum	Metal	None	None	Metal	None	Walls & Ceiling	
123	Pl. On Stud Only	None	Tile	Glazed	Block	None	None	None	Walls & Ceiling	Non Slip Floor
124	Plaster	None	Tile	Tile	None	None	Metal	None	Walls & Ceiling	
125	Pl. On Stud Only	None	Linoleum	Metal	None	None	Metal	None	Walls & Ceiling	
126	Pl. On Stud Only	None	Linoleum	Metal	None	None	Metal	None	Walls & Ceiling	

·DOOR · SCHEDULE·

MARK	SIZE	TYPE	MATERIAL	GLASS	REMARKS
1	2 Drs 2'-8"x7'-0"x1 3/4"	3 Panel Gl.	Fir	Clear D.S. Gl.	Transom·
2	2 Drs · 4'-0"x9'-5"x2 1/4"	3 Panel	Fir	None	
3	3'-3"x7'-1 1/2"x1 3/4"	2 Panel	Fir	None	
4	2 Drs 3'-0"x7'-0"x1 3/4"	2 Panel	Fir	None	
5	2'-8"x7'-0"x1 3/4"	2 Panel	Fir	None	
6	2'-6"x7'-0"x1 3/4"	2 Panel	Fir	None	
7	2'-4"x7'-0"x1 3/4"	2 Panel	Fir	None	
8	3'-0"x7'-0"x1 3/4"	2 Panel	Fir	None	
9	2 Drs 2'-6"x7'-0"x1 3/4"	2 Panel	Fir	Top Panel Gl.	Clear D.S. Glass
10	3'-0"x7'-0"x1 3/4"	2 Panel Split Door	Fir	None	Shelf On Bottom Dr.
25	3'-0"x7'-0"x1 3/4"	2 Panel	Fir	None	
26	2'-6"x7'-0"x1 3/4"	2 Panel	Fir	None	
27	2'-6"x7'-0"x1 3/4"	2 Panel	Fir	None	

Drawn By W.J.S.
Traced By W.J.S.
Checked By D.H.
Supervisor T.
Chief Dfmn [illegible]
In Charge.

·PUGET SOUND NAVY YARD·
·BREMERTON·WASH·
·NAVAL AIR STATION·
SEATTLE·WASHINGTON·
·RECREATION BUILDING·
·FIRST FLOOR PLAN·
Approved: 9/24/40
Public Works Officer

12	[illegible]	9-24-40

ISSUED
SCALE AS NOTED
P.W. DRAWING 17128

47
55705
13-34-594
M
79